


PBFR7023~7035N/P

Description



Mechanical Dimensions

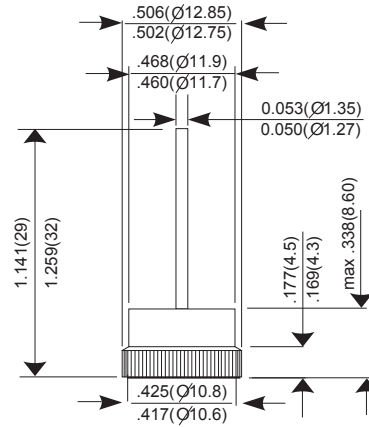

BOSCH PRESS-FIT

Dimensions in inches and (millimeters)

Features

- ★ Low forward voltage drop
- ★ High current capability
- ★ High reliability
- ★ High surge current capability
- ★ Avalanche type

Mechanical Data

- ★ Case: OFC Heat Sink
- ★ Encap: Epoxy Sealed Rated UL94V-0
- ★ P Type Brown Ring; N Type-Black Ring
- ★ Weight: 6.90gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

	SYMBOL	PBFR7023N/P	PBFR7035N/P	PBFR7043N/P	UNIT
Maximum Peak Repetitive Reverse Voltage@Irrm=10uA	VRRM	20~26	24~32	38~47	V
Maximum RMS Voltage	VRMS	14~18	19~22	26~33	V
Maximum DC Blocking Voltage(TA=25°C)	VB	20~26	24~32	38~47	V
Maximum Average Forward Current Io@Tc=150°C 60 Hz, resistive or inductive load	I(AV)	70			A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	800			A
Maximum Inst. Forward Voltage Drop, IF at 100Amp	VF	1.1			V
Maximum DC Reverse Current (VB)@TJ=25°C At Rated DC Reverse Voltage 16/20/33@TJ=100°C	IR	0.5 200			uA uA
Operating Junction and Storage Temperature Range	TJ, TSTG	-65 to +175			°C