

BT7596	SIMPLE SWITCHER Power Converter 150 kHz 3A Step-Down Voltage Regulator
---------------	---

DESCRIPTION

The BT7596 series of regulators are monolithic integrated circuits that provide all the active functions for a step-down switching regulator, capable of driving a 3A load with excellent line and load regulation. These devices are available in fixed output voltages of 3.3V, 5V, 12V and an adjustable output version.

Requiring a minimum number of external components, these regulators are simple to use.

The BT7596 series operates at a switching frequency of 150kHz. Available in standard 5-lead TO-220 package.

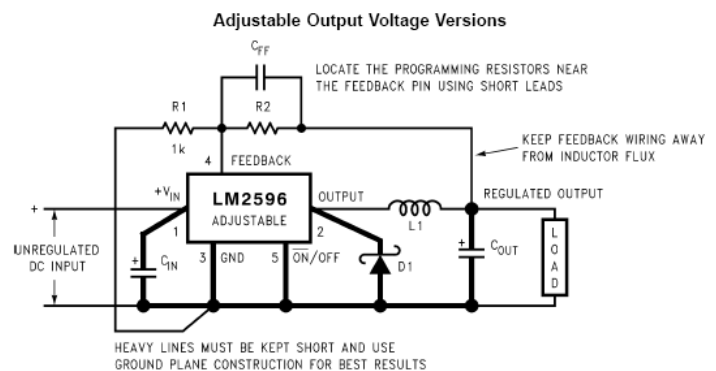
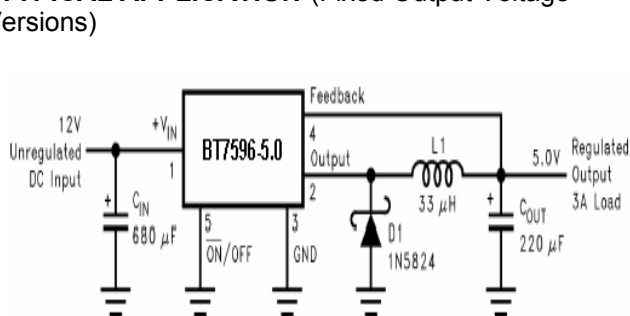
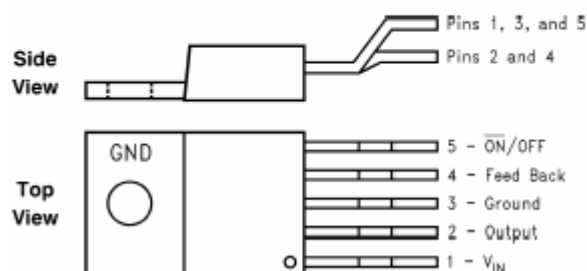
Other features include a guaranteed $\pm 3\%$ tolerance on output voltage under specified input voltage and output load conditions, and $\pm 15\%$ on the oscillator frequency. External shutdown is included, featuring typically 100 μ A standby current. Self protection features include a two stage frequency reducing current limit for output switch and an over temperature shutdown for complete protection under fault conditions. The over temperature shutdown level is about 145°C with 5°C hysteresis.

FEATURES

- 3.3V, 5V, 12V, and adjustable output versions
- Adjustable version output voltage range, 1.2V to 37V $\pm 3\%$ max over line and load conditions
- Available in TO-220
- Guaranteed 3A output load current
- Input voltage range up to 40V
- Requires only 4 external components
- Excellent line and load regulation specifications
- 150 kHz fixed frequency internal oscillator
- TTL shutdown capability
- Low power standby mode, I_Q typically 100 μ A
- High efficiency
- Thermal shutdown and current limit protection

APPLICATIONS

- Simple high-efficiency step-down (buck) regulator
- On-card switching regulators
- Positive to negative converter

TYPICAL APPLICATION (Fixed Output Voltage Versions)

CONNECTION DIAGRAMS AND ORDERING INFORMATION
**Bent and Staggered Leads, Through Hole Package
5-Lead TO-220**


Absolute Maximum Ratings

Maximum Supply Voltage	45V
ON /OFF Pin Input Voltage	-0.3 ≤ V ≤ +25V
Feedback Pin Voltage	-0.3 ≤ V ≤ +25V
Output Voltage to Ground	-1V
Storage Temperature Range	-65°C to +150°C
Power Dissipation	Internally limited
Maximum Junction Temperature	+150°C

Operating Conditions

Temperature Range	-40°C ≤ T _J ≤ +125°C
Supply Voltage	4.5V to 40V

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, T_J=25°C. V_{IN} = 12V for the 3.3V, 5V and Adjustable version and V_{IN} = 24V for the 12V version. I_{LOAD} = 500mA.

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Output Voltage	V _{OUT}	BT7596-3.0 4.75V ≤ V _{IN} ≤ 40V, 0.2A ≤ I _{LOAD} ≤ 3A	3.20	3.30	3.40	V
		BT7596-5.0 7V ≤ V _{IN} ≤ 40V, 0.2A ≤ I _{LOAD} ≤ 3A	4.85	5.0	5.15	
		BT7596-12 15V ≤ V _{IN} ≤ 40V, 0.2A ≤ I _{LOAD} ≤ 3A	11.64	12.0	12.36	
Efficiency	η	BT7596-3.0 I _{LOAD} = 3A		73		%
		BT7596-5.0 I _{LOAD} = 3A		80		
		BT7596-12 V _{IN} = 24V, I _{LOAD} = 3A		90		
		BT7596-Adj V _{IN} = 12V, V _{OUT} = 3V, I _{LOAD} = 3A		73		
Feedback Voltage	V _{FB}	BT7596-Adj 4.5V ≤ V _{IN} ≤ 40V, 0.2A ≤ I _{LOAD} ≤ 3A, V _{OUT} programmed for 3V	1.210	1.230	1.250	V
Feedback Bias Current	I _b	BT7596-Adj V _{FB} = 1.3V		15	50	nA
Oscillator Frequency	f _O		127	150	173	kHz
Saturation Voltage	V _{SAT}	I _{OUT} = 3A (Note 1,2)		1.16	1.4	V
Max Duty Cycle (ON)	DC	(Note 2)		100		%
Min Duty Cycle (OFF)		(Note 3)		0		
Current Limit	I _{CL}	Peak Current (Note 1,2)	3.4	4.5	6.0	A
Output Leaked Current	I _L	Output = 0V (Note 1,3)			50	μA
		Output = -1V, V _{IN} = 40V		2	30	mA
Quiescent Current	I _Q	(Note 3)		5	10	mA
Standby Quiescent Current	I _{STBY}	ON/OFF pin = 5V (OFF), V _{IN} = 40V		100	200	μA
ON/OFF Pin Logic Input Threshold Voltage				1.3		
	V _{IH}	Low (Regulator ON)			0.6	V
	V _{IL}	High (Regulator OFF)	2.0			
ON/OFF Pin Input Current	I _H	V _{LOGIC} = 2.5V (Regulator OFF)		5	15	μA
	I _L	V _{LOGIC} = 0.5V (Regulator ON)		0.02	5	

Note 1: No elements connected to output pin.

Note 2: Feedback pin removed from output and connected to 0V to force the output transistor switch ON.

Note 3: Feedback pin removed from output and connected to 12V for the 3.3V, 5V, and the A version, and 15V for the 12V version. To force the output transistor switch OFF.



<h2>BT7596</h2>	<h3>SIMPLE SWITCHER Power Converter 150 kHz 3A Step-Down Voltage Regulator (Chip)</h3>
-----------------	--

PHYSICAL CHARACTERISTICS

- Wafer Diameter.....100 ± 0.5 mm
- Wafer Thickness.....350 ± 20 μm
- Scribe Width..... 100 μm
- Passivation.....PSG
- Metallization bottom..... Ti-Ni-Ag
 - Ti-Ni – 0.5-0.7μm
 - Ag – 0.6-0.1μm

PAD LOCATION COORDINATES

Pad No	Pad Name	X (μm)	Y (μm)
1	V _{IN}	463	1252
1A	V _{IN}	225	-95
2	OUTPUT	-445	547
2A	OUTPUT	-245	615
3	GROUND	-875	-120
4	FEEDBACK	-875	-1355
5	ON/OFF	875	-1355

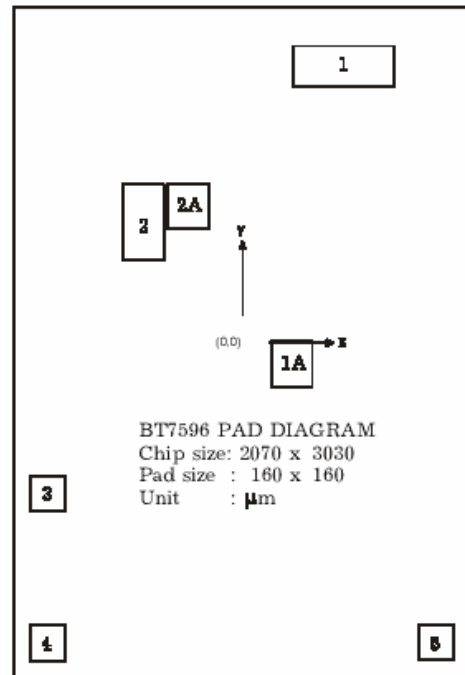
Note:

- ◆ The chip substrate is electrically connected to GND (Pad 3)
- ◆ Pads 1 and 1A are internally connected
- ◆ Pads 2 and 2A are internally connected

Note:

Wire diameter > 60 micron
 PAD 1 and PAD 1A (V_{IN}) are connected to the Pin1.
 PAD 2 and PAD 2A (OUTPUT) are connected to the Pin 2.
 PAD 3 (GROUND) is connected to the Pin 3.
 PAD 4 (FEEDBACK) is connected to the Pin 4.
 PAD 5 (ON/OFF) is connected to the Pin 5.

BT7596 PAD LAYOUT



BONDING DIAGRAM

