






UFP30C05~30C60

Description









Mechanical Dimensions

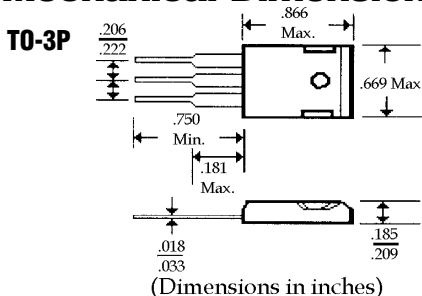

Features


- LOW FORWARD VOLTAGE
- HIGH SURGE CAPABILITY
- SUPERFAST RECOVERY TIME
- MEETS UL SPECIFICATION 94V-0

	UFP30C05....30C60 Series								Units
	05	10	15	20	30	40	50	60	
Maximum Ratings									
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	150	200	300	400	500	600	Volts
Working Peak Reverse Voltage... V_{RWM}	50	100	150	200	300	400	500	600	Volts
DC Blocking Voltage... V_{DC}	50	100	150	200	300	400	500	600	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	105	140	210	280	350	420	Volts
Average Forward Rectified Current... $I_{F(av)}$ $T_C = 150^\circ\text{C}$ @ Rated V_{DC}					15				Amps
					30				Amps
Repetitive Peak Forward Surge Current... I_{FM} @ Rated V_{DC} , Square Wave, 20 kHz, $T_C = 150^\circ\text{C}$					30				Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} @ Rated Load Cond., 1/2 Wave, Single Phase, 60Hz					300				Amps
Operating & Storage Temperature Range... T_J, T_{STRG}					-65 to 175				$^\circ\text{C}$
Electrical Characteristics									
Maximum Forward Voltage... V_F @ $I_F = 15$ Amps, PW = 300 μs									Volts
									Volts
Maximum DC Reverse Current... I_R @ Rated DC Blocking Voltage						500			μAmps
						10			μAmps
Maximum Reverse Recovery Time... t_{RR} $I_F = 1.0$ Amp, di/dt = 50 Amps/ μs							50		ns

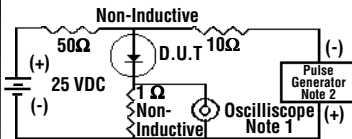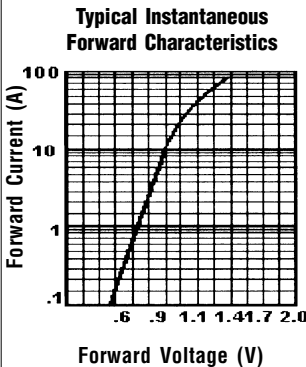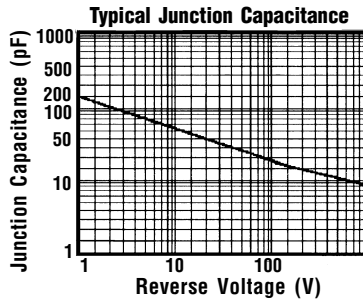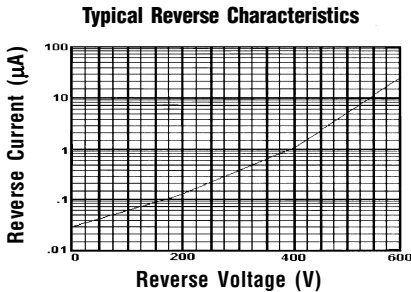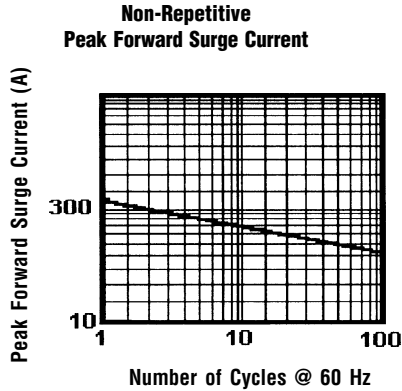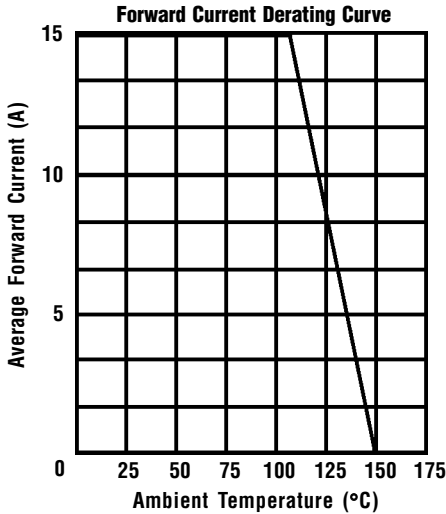

Notes:

1. Rise Time = 7 ns Max.
Impedance = 1 megohm, 22 pF
2. Rise Time = 10 ns Max.
Source Impedance = 50 Ohms



Time Base Set @ 50/100ns/cm

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 Hz Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.