



1.5 WATTS Surface Mount Zener Diode


1SMA5921B~5945B

Description



SMA/DO-214AC

Mechanical Dimensions

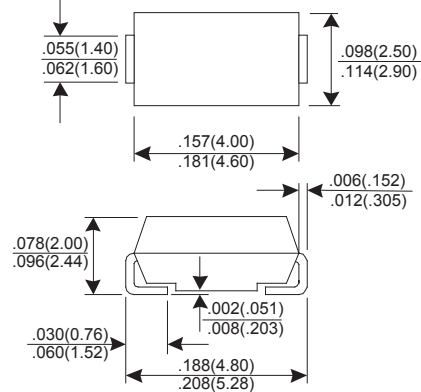

Dimensions in inches and (millimeters)

Features

- ★ For surface mounted applications
- ★ 1.5 W power dissipation
- ★ Ideally suited for automated assembly processes

Mechanical Data

- ★ Case: Molded plastic SMA/DO-214AC
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-750 method 2026
- ★ Polarity: cathode band
- ★ Mounting position: Any
- ★ Weight: 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNIT
Power Dissipation (Note 1)	P _D	1.5	W
Half sine-wave superimposed on rated load (Note 2) (JEDEC method)	I _{FSM}	10	A
Operating junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C

NOTES: □ (1) Mounted on 5.0mm² (.013mm thick) land areas.
 (2) Measurd on 8.3ms, single half-sine wave or equivalent square wave, duty cycle = 4 pulses per minute maximum. □

1.5 WATTS Surface Mount Zener Diode

FIG 3. ZENER VOLTAGE-10 TO 12 VOLTS

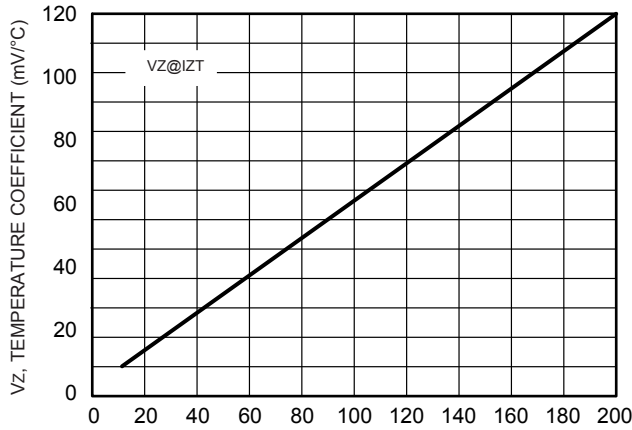


FIG 4. EFFECT OF ZENER CURRENT

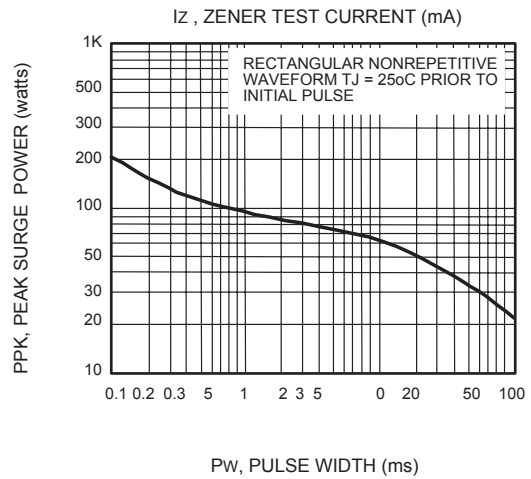
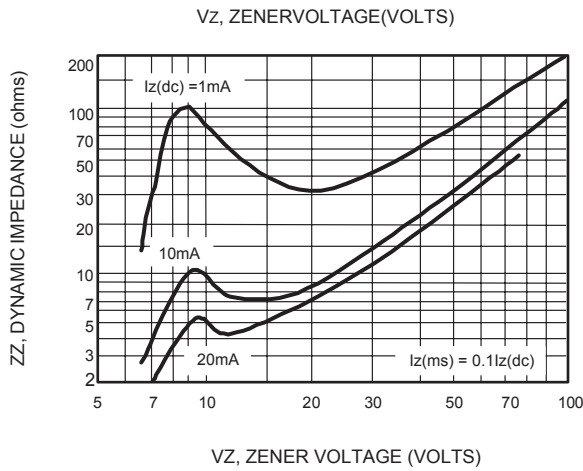
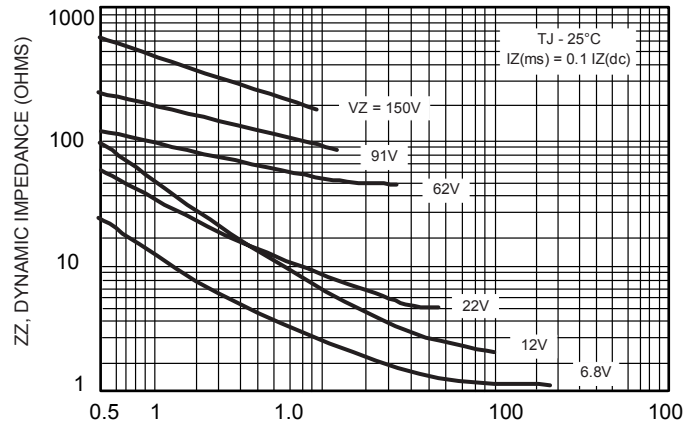


Fig 5. VZ = 6.8 THRU 10VOLTS

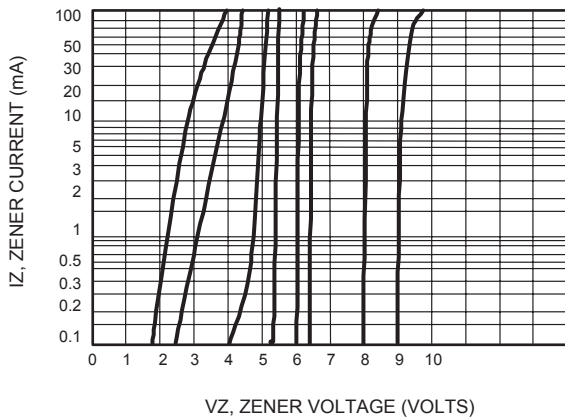


Fig 6. VZ=12 THRU 82 VOLTS

